



Clear LEXAN® CORRUGATED SHEET

Product Warranty

TEN-YEAR LIMITED WARRANTY AGAINST YELLOWING AND LIGHT TRANSMISSION

If excessive yellowing and light transmission losses as defined herein occur during a ten (10) year period from the date of sale, General Electric Company will provide a replacement clear LEXAN CORRUGATED sheet to the purchaser or a fabricator designated by the purchaser at a cost to the purchaser of 1/120 of the original purchase price for each month from the date of sale. The failed sheet, original sales receipt and this warranty must be returned to GE Structured Products or the original dealer. If a replacement sheet cannot be provided within fourteen days, GE Structured Products may opt to refund the pro-rated purchase price of the original sheet.

THREE-YEAR LIMITED WARRANTY AGAINST HAILSTONE BREAKAGE

If during a three (3) year period from the date of sale this product suffers hail breakage (defined as surface penetration or puncture that permits water to leak through) from hailstones measuring up to 7/8 inch (22.2 mm) traveling at speeds up to 200 feet/second (60 meters/second), General Electric Company will provide a replacement clear LEXAN CORRUGATED sheet to the purchaser thereof, or fabricator designated by the purchaser, at a cost to the purchaser of 1/36 of the original purchase price for each month from date of sale. The failed sheet, original sales receipt and this warranty must be returned to GE Structured Products or to the original dealer. If a replacement sheet cannot be provided within fourteen days, General Electric may opt to refund the pro-rated purchase price of the original sheet. All claims under this warranty will be conclusively resolved by the results of subsequent impact testing by GE Structured Products of the returned sheet using the ASTM D3029/Ford modified Gardner Test, which equates a 7/8 inch hailstone traveling at 200 feet/second to 5 foot/pounds of force. Any sheet which shows surface penetration or puncture that permits water to leak through when so tested shall entitle the purchaser thereof to the replacement or refund remedies as described above.

CONDITIONS

This warranty applies only to sheet fabricated, installed, and cleaned according to GE Structured Products recommendations as stated in clear LEXAN CORRUGATED sheet publications produced by GE Structured Products. It is important to note that clear LEXAN CORRUGATED sheet is designed for weathering resistance and does NOT PROVIDE ABRASION RESISTANCE; NO WARRANTIES ARE EXTENDED ON THE ABRASION RESISTANCE CHARACTERISTICS OF THIS PRODUCT. THIS WARRANTY DOES NOT COVER (RE)INSTALLATION EXPENSES OR ANY OTHER DIRECT OR INDIRECT LOSS(ES) WHICH MAY RESULT FROM THE SHEET FAILURE.

Yellowing and Light Transmission: This warranty against yellowing and light transmission applies only to clear LEXAN CORRUGATED sheet. The Yellowness Index (YI) of clear LEXAN CORRUGATED sheet cleaned according to the recommendations of GE Structured Products shall be less than 8.0 during a five-year period from the date of sale, and shall be less than 10 during a ten-year period from the date of sale as determined according to ASTM D1925 (1970). The light transmission characteristics of clear LEXAN CORRUGATED sheet, cleaned according to the recommendations of GE Structured Products, shall not decrease by more than 12% during a ten-year period from the date of sale when tested by the procedure specified in ASTM D1003. This warranty is limited to excessive yellowing and light transmission losses due to the degradation of CLEAR LEXAN CORRUGATED SHEET AND DOES NOT COVER YELLOWING OR LIGHT TRANSMISSION LOSSES DUE TO DIRT, ATMOSPHERIC DEPOSITS, ABRASION, OR CHANGES IN THE PHYSICAL STRUCTURE OF THE CLEAR LEXAN CORRUGATED SHEET.


Impact: For a period of 3 years, this product shall be warranted against hail breakage (hail breakage defined as skin penetration) from hailstones up to 7/8" (22.2 mm) traveling at speeds up to 200 ft/sec (60 meters/sec). Resolution of claims will be determined through subsequent impact testing of the sheet in question using ASTM D3029/Ford modified Gardner Test. A 7/8" hailstone travelling at 200 ft/sec equates to 5 ft-lbs force on the above test. Sheets testing less than 5 ft-lbs shall be warranted.

You should be aware that all glazing is subject to irreversible depositions of atmospheric elements and can be expected to show signs of hazing eventually. Annual cleaning following recommended procedures will significantly reduce, but not eliminate, that process. (See reverse side for cleaning and maintenance instructions.) This warranty does not cover abrasion or scratching. **THE WARRANTIES STATED IN THIS PUBLICATION ARE IN LIEU OF ALL OTHER WARRANTIES (EXCEPT OF TITLE), WRITTEN OR ORAL, STATUTORY, EXPRESS OR IMPLIED INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. GENERAL ELECTRIC'S SOLE OBLIGATION, WHETHER IN CONTRACT, TORT (INCLUDING NEGLIGENCE) OR OTHERWISE, SHALL BE LIMITED TO REPLACING THE SHEET OR REFUNDING THE PRO-RATED ORIGINAL PURCHASE PRICE, AT ITS OPTION, WHICH SHALL BE YOUR SOLE AND EXCLUSIVE REMEDY. GE STRUCTURED PRODUCTS SHALL IN NO EVENT BE LIABLE FOR CONSEQUENTIAL, INCIDENTAL, OR SPECIAL DAMAGES. UNDER NO CIRCUMSTANCES SHALL GENERAL ELECTRIC BE LIABLE FOR ANY AMOUNT GREATER THAN THE PURCHASE PRICE OF THE SHEET PURCHASED.**

Notice: This dealer is authorized to fulfill the above obligations of this warranty to the purchaser at the expense of General Electric Company, GE Structured Products, One Plastics Avenue, Pittsfield, Massachusetts 01201.

This limited warranty must be completed by the dealer at the time of sale.

Customer Name:	_____
Dealer Name:	_____
Date of Sale:	_____
GE Lot Number:	_____

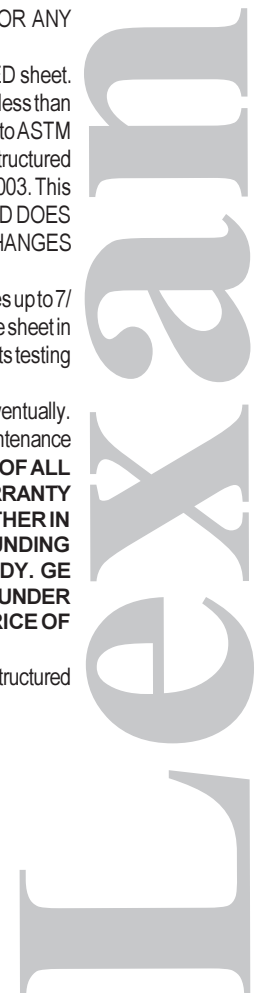

CLEANING AND MAINTENANCE INSTRUCTIONS

Annual cleanings using proper procedures and compatible cleaners is recommended to prolong the service life.

For general cleaning, it is recommended that the following instructions and cleaning agents be used. These procedures and cleaners are also recommended for use on the untreated, interior surface of the clear LEXAN CORRUGATED sheet.



**For more information
call: (800) 451-3147 or
(413) 448-5400**

Although all information, recommendations, or advice contained herein is given in good faith, no guarantee is made that the same results as those described will be obtained or, as to the effectiveness or safety of any design, and General Electric Company*, USA, its subsidiaries, affiliates and authorized representatives shall in no event be held responsible for any loss incurred through such use of the products. Each user shall make its own determination of the suitability of the products or any such information, recommendations or advice for its own particular use. The products of General Electric Company, its subsidiaries or affiliates are sold in any event subject to the Conditions of Sale constituting part of the applicable representative or other sales agreement or printed on the back of order acknowledgments or invoices or are available upon request. Nothing in this or any other document or any oral recommendation or advice shall be deemed to alter, vary, supersede, or waive any of the Conditions of Sale. Statements concerning possible or suggested uses of the materials or designs described herein are not to be construed as constituting a license under any General Electric Company or subsidiary or affiliate company patent covering such use or as recommendations for use of such materials or designs in the infringement of any patent.

CLEANING PROCEDURES

1. Rinse sheet with lukewarm water.
2. Wash sheet with a mild soap and lukewarm water.
3. Use a soft cloth or sponge and gently wash to loosen remaining dirt and grime. **DO NOT SCRUB, USE BRUSHES OR ABRASIVE CLEANERS:** the coating on clear LEXAN CORRUGATED sheet is UV resistant. It is NOT a Mar-Resistant Coating.
4. Repeat rinse and dry with a soft cloth to prevent water spotting.

COMPATIBLE CLEANING AGENTS

- Aqueous Solutions of Soaps and Detergents

Windex ¹	Top Job ²	Joy ²
Mr. Clean ²	Fantastik ³	Formula 409 ⁴
- Organic Solvents & Cleaners

Aliphatic Hydrocarbons	Neleco-Placer	Kerosene
Naptha (VM&P grade)	Hexcel, F.O. 554	Turco 5042
- Alcohols

Methanol	Isopropyl	
----------	-----------	--

CAUTIONS

- Do not use abrasive or highly alkaline cleaners. Never scrape with razor blades or other sharp instruments.
- Benzene, leaded gasoline, acetone or carbon tetrachloride should never be used.
- Do not clean in hot sun or at elevated temperatures.

FRESH PAINT SPLASHES, GREASE AND GLAZING COMPOUND REMOVAL

Before drying, these conditions can be easily remedied by rubbing lightly with a good grade of VM&P naphtha, isopropyl alcohol, or butyl cellosolve. Afterwards, a warm final wash should be made using a mild soap or detergent solution and a thorough rinsing with clean water.

LABEL AND STICKER REMOVAL

The use of kerosene or VM&P naphtha are generally effective in removing labels and stickers. A warm wash and rinse should always follow the use of these products.

In cases where the sticker material, such as vinyl, does not allow the penetration of solvent, the application of heat (a hair dryer, for example) will soften the adhesive and promote removal.

Caution: Excessive heat can cause surface damage.

Clear LEXAN CORRUGATED sheet is coextruded on one side. The coextruded side must be glazed outwards or towards the light source to provide protection for the LEXAN sheet substrate.

¹Registered Trademark of the Drackett Products Company.

²Registered Trademarks of Procter & Gamble.

³Registered Trademark of Texize, Division of Norton Norwich Products, Inc..

⁴Registered Trademark of the Clorox Company.



GE Structured Products

General Electric Company
One Plastics Avenue
Pittsfield, MA 01201

www.structuredproducts.ge.com